

MOTO GUZZI

V7 850 Special & Stone my 21/- V7 850 Sport my 25/-

MM119.1TD-K


EN	Min	Max	supplied
length mm (A-A):	372	381	375
ID & Spring Length mm	52-220		
Spring rate N/mm	20		
Preload mm:	15 (−2 / +4)		
setpoints: from fully closed turn anticlockwise			
rebound (B):	n° clic	20	
Gas / Pressure	N ₂ Azoto		6 bar

A-A = Length
B = Rebound adjustment unit
C = length adjustment unit
D = Spring preload unit




WARNING

this side DOWN

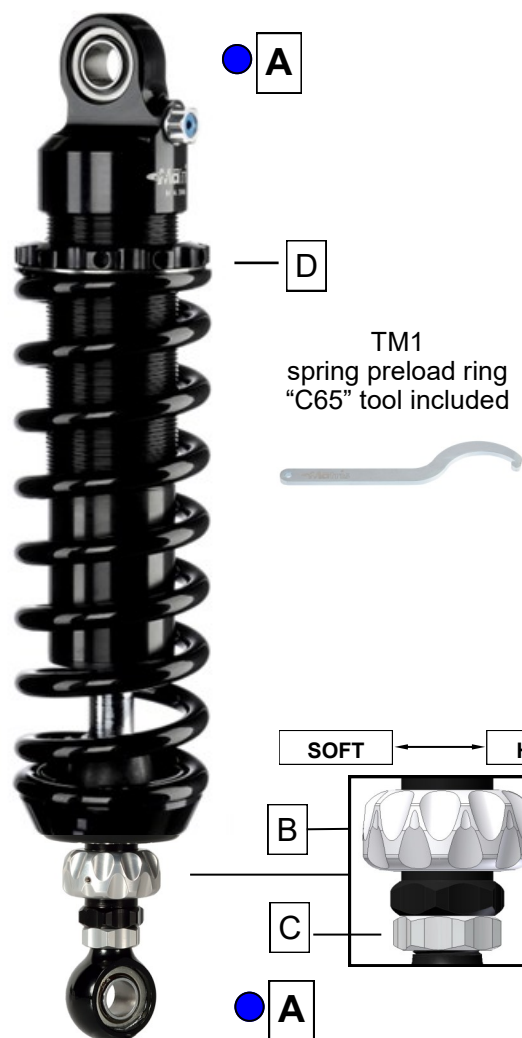

WARNING

Do not remove or unscrew the bottom eyelet or fork joint beyond the maximum limit indicated with the colored line (ref.1)



ATTENTION: To remove the shock and tightening torques, follow the service manual



All technical interventions for maintenance and/or modification of the product must be performed by Matris Company or a Matris authorized service center.

The product image is generic and for information only. The product may vary depending on the specific applications.

MOTO GUZZI

V7 850 Special & Stone my 21/-

V7 850 Sport my 25/-

MM119.1TD-K

IT	Min	Max	fornito
Interasse A-A mm	372	381	375

Di & Lunghezza molla mm	52-220
Costante molla N/mm	20
Precarico molla mm	15 (-2 / +4)

Impostazioni tarature:
Da tutto chiuso agire in senso antiorario


Estensione (B)	n° clic	20
----------------	---------	----

Gas / Pressione	N ₂ Azoto	6 bar
-----------------	----------------------	-------


A-A = Interasse
B = Regolazione estensione
C = Regolazione interasse
D = Gruppo precarico molla



questo lato in BASSO

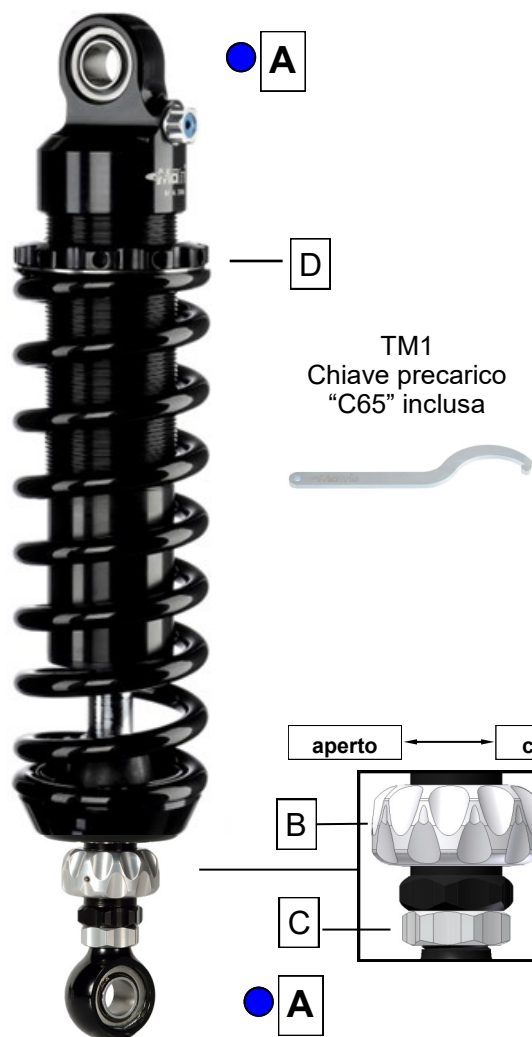

Non svitare o sfilare l'attacco inferiore tipo snodo o tipo forcelletta oltre il limite massimo indicato dalla linea colorata (rif.1)



ATTENZIONE:
Per lo smontaggio dell'ammortizzatore e le coppie di serraggio delle viti, seguire il manuale di officina

ATTENZIONE: Interventi tecnici per manutenzione e/o modifica del prodotto devono essere fatti da Matris srl o Centro Assistenza Autorizzato.

L'immagine del prodotto è generica e indicativa. Il prodotto potrebbe variare in relazione alle specifiche applicazioni.